


# CR2

## CR Cylindrical-type Lithium Battery(Standard type)

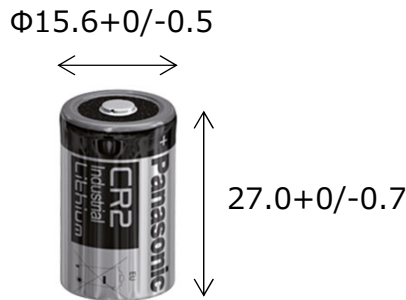

### Specifications

Nominal voltage		3V
Nominal capacity		850mAh
Continuous drain		20mA
Dimensions*1	Diameter(Max.)	15.6mm
	Height(Max.)	27.0mm
Weight*1		Approx. 11.0g
Operating temperature*2		-40°C ~ +70°C

\*1 Without tabs.

\*2 Please consult Panasonic when anticipating usage in operating temperatures between -40°C and -20°C, or 60°C and 70°C.


### Features & Benefits

- Suitable for Camera, Light, etc. because of super high rate discharge.
- Easy to get high rate discharge because manganese dioxide is used in positive electrode and spiral design is adopted at the polar plate.
- Available in consumer market

### Applications

Lights, Security devices (electric door locks, Fire alarms), automotive electric components (eCall), Medical Devices(AEDs), etc.

### Discharge temperature characteristics

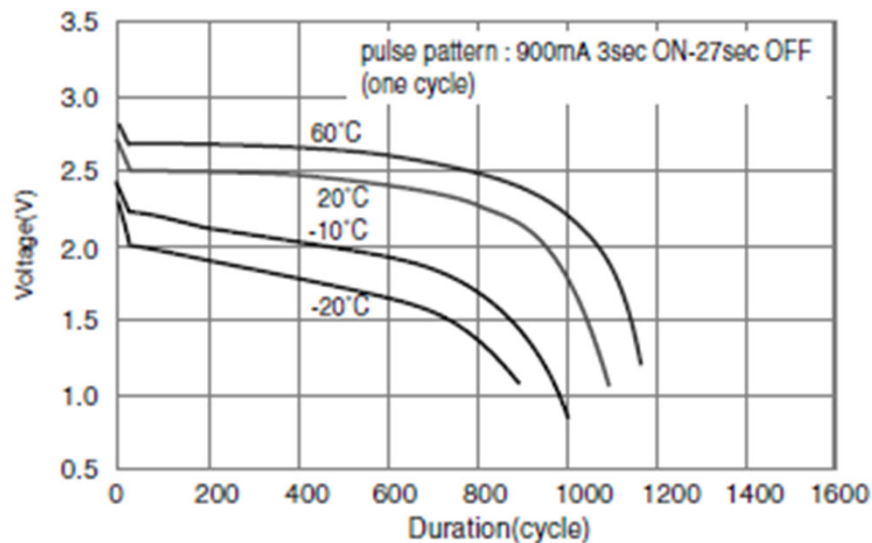

[Panasonic Energy Co., Ltd.](http://Panasonic Energy Co., Ltd.)

As of July, 2024. Panasonic offers batteries with tabs or lead wires. This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. The contents of this product information are subject to change without notice.

