


BR-AG

BR Cylindrical-type Lithium Battery

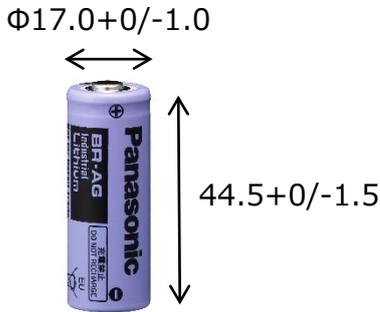


Features & Benefits

- Long-term operating performance
- Suitable for Power supplies for products such as that demand long-term reliability

Applications

Commercial equipment (communication/measurement devices), meters (gas, water, electricity, hot water), memory backup (large FA equipment), automotive electronic components (security alarms), etc.

Discharge temperature characteristics

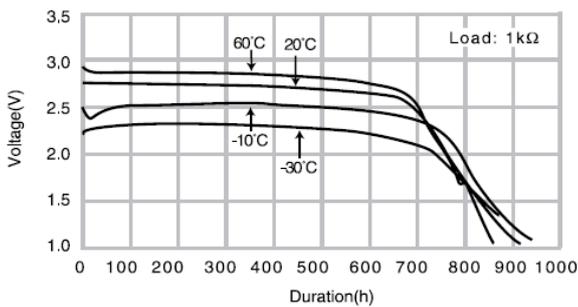

Specifications


Nominal voltage	3V	
Nominal capacity	1,800mAh	
Continuous drain	2.5mA	
Dimensions* ¹	Diameter(Max.)	17.0mm
	Height(Max.)	45.5mm
Weight* ¹	Approx. 18.0g	
Operating temperature	-40°C ~ +85°C	

*¹ Without tabs.

Terminal types

Please see the documents for the terminal and lead wire settings.
- [Line up of tab terminal types by product number](#)

Operating voltage vs. Discharge current (voltage at 50% discharge depth)

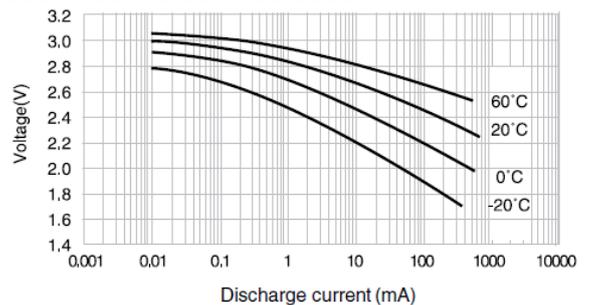

[Panasonic Energy Co., Ltd.](#)

As of July, 2024. Panasonic offers batteries with tabs or lead wires. This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. The contents of this product information are subject to change without notice.

