
BR2450A BR Coin-type Lithium Battery for high temperature



Features & Benefits

 In addition to the appeal of our BR series coin-type lithium batteries, poly-carbonmonofluoride cells can operate in the temperatures up to 125°C

Specifications

Nominal voltage		3V
Nominal capacity		550mAh
Continuous drain		0.03mA
Dimensions [*]	Diameter(Max.)	24.5mm
1	Height(Max.)	5.0mm
Weight ^{*1}		Approx. 4.9g
Operating temperature		-40°C to +125°C

*1 Without tabs.


Applications

Automotive electronic components(TPMS, ETC), hot water and electricity meters, memory backup(host computers, FA equipment), etc.

Terminal types

Please see the documents for the terminal and lead wire settings. - <u>Line up of tab terminal types by product number</u>

Discharge temperature characteristics

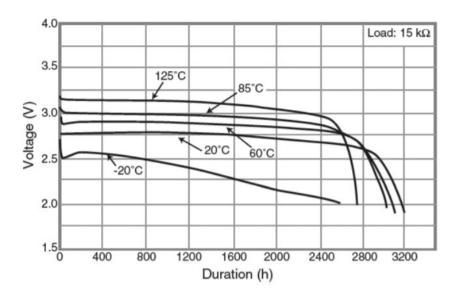





As of July, 2024. Panasonic offers batteries with tabs or lead wires. This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. The contents of this product information are subject to change without notice.